



QUICK-FIT



THE WORLD'S FASTEST DUCTING

**BUTTERFLY VALVE
BACK BLAST DAMPER**


BUTTERFLY VALVE

Ø	PART NO.	ENDS	LENGTH (L)	GAUGE	WEIGHT (GALV)
3"	3208-0300	QF	8"	22	1.50
4"	3208-0400	QF	8"	22	1.85
5"	3208-0500	QF	8"	22	2.00
6"	3208-0600	QF	8"	22	2.40
7"	3208-0700	QF	8"	22	3.20
8"	3208-0800	QF	13"	22	4.10
9"	3208-0900	QF	13"	22	4.85
10"	3208-1000	QF	13"	22	5.45
11"	3208-1100	QF	13"	20	7.00
12"	3208-1200	QF	13"	20	8.40
13"	3208-1300	QF	17"	20	9.75
14"	3208-1400	QF	17"	20	11.85
15"	3208-1500	QF	17"	20	12.70
16"	3208-1600	QF	17"	20	14.20
17"	3208-1700	QF	23"	20	16.10
18"	3208-1800	QF	23"	20	18.00
20"	3208-2000	QF	23"	20	27.75
22"	3208-2200	QF	23"	20	32.40
24"	3208-2400	QF	23"	20	37.90

Butterfly Valve



- A standard locking quadrant handle enables users to regulate air volumes in clean air applications.
- For use only in clean air applications.
- SS butterfly valves use zinc plated operator.




IN LINE BACK BLAST DAMPER

Ø	PART NO.	ENDS	LENGTH (L)	GAUGE	WEIGHT (GALV)
3"	3219-0300	QF	17.5"	18	2.25
4"	3219-0400	QF	18.5"	18	3.00
5"	3219-0500	QF	19.5"	18	3.50
6"	3219-0600	QF	20.5"	18	4.00
7"	3219-0700	QF	21.5"	18	4.50
8"	3219-0800	QF	22.5"	18	5.00
9"	3219-0900	QF	23.5"	18	10.00
10"	3219-1000	QF	24.5"	18	20.00
11"	3219-1100	QF	25.5"	18	25.00
12"	3219-1200	QF	26.5"	18	30.00
13"	3219-1300	QF	27.5"	18	36.00
14"	3219-1400	QF	28.5"	18	42.00
15"	3219-1500	QF	29.5"	18	49.00
16"	3219-1600	QF	30.5"	18	59.00
17"	3219-1700	QF	31.5"	18	63.00
18"	3219-1800	QF	32.5"	18	72.00
20"	3219-2000	QF	34.5"	16	78.00
22"	3219-2200	QF	36.5"	16	85.00
24"	3219-2400	QF	38.5"	16	90.00
26"	3219-2600	FLANGE	40.5"	16	100.00
28"	3219-2800	FLANGE	42.5"	16	110.00
30"	3219-3000	FLANGE	44.5"	16	115.00
32"	3219-3200	FLANGE	46.5"	16	120.00
34"	3219-3400	FLANGE	48.5"	16	130.00

In Line Back Blast Damper



- Used to reduce backward air flow in the line.
- Designed for use in a horizontal line. Call factory if vertical operation is required.

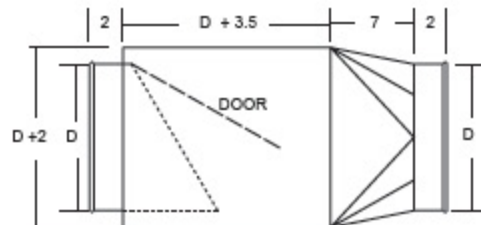

ORDERING NOTES:

Unless specified, 3" through 24" is QF, over 24" is flanged. Data is subject to change without notice. Stainless steel components requiring flanges will be supplied with SS flanges unless otherwise specified. Stainless steel components are manufactured with NO.304 SS. [Prices for SS 316 = SS 304 X 1.25] Adding a SS after standard part numbers specifies a SS part. For special parts or items to be custom manufactured call for quotation.

WWW.DUCTMONKEY.NET • 951-739-9593