



QUICK-FIT



THE WORLD'S FASTEST DUCTING

ADJUSTABLE NIPPLE CLAMP


ADJUSTABLE NIPPLE WITH O-RING

Ø	PART NO.	ENDS	LENGTH (L)	GAUGE GAL	GAUGE SS	WEIGHT (GALV)
3"	3202-0300	QF	11 1/4"	22	22	0.80
4"	3202-0400	QF	11 1/4"	22	22	1.05
5"	3202-0500	QF	11 1/4"	22	22	1.30
6"	3202-0600	QF	11 1/4"	22	22	1.60
7"	3202-0700	QF	11 1/8"	22	22	2.40
8"	3202-0800	QF	11"	22	22	2.70
9"	3202-0900	QF	11"	22	22	3.05
10"	3202-1000	QF	10 7/8"	22	22	3.40
11"	3202-1100	QF	10 5/8"	22	22	3.80
12"	3202-1200	QF	10 5/8"	22	22	4.20
13"	3202-1300	QF	10 5/8"	20	20	4.70
14"	3202-1400	QF	10 5/8"	20	20	5.85
15"	3202-1500	QF	10 5/8"	20	20	6.25
16"	3202-1600	QF	10 5/8"	20	20	6.65
17"	3202-1700	QF	10 5/8"	20	20	7.05
18"	3202-1800	QF	10 5/8"	20	20	7.45
20"	3202-2000	QF	10 5/8"	20	20	8.10
22"	3202-2200	QF	10 5/8"	20	20	8.80
24"	3202-2400	QF	10 5/8"	20	20	9.70

Adjustable Nipple with O-Ring



- Used to provide variable length adjustment of QF System. Black O-ring included.
- Specify Red O-ring if needed.

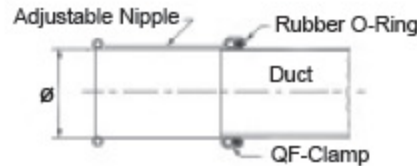

CLAMP WITH PIN

Ø	PART NO.	WEIGHT (GALV)
3"	3260-0300	0.15
4"	3260-0400	0.20
5"	3260-0500	0.22
6"	3260-0600	0.25
7"	3260-0700	0.45
8"	3260-0800	0.50
9"	3260-0900	0.55
10"	3260-1000	0.55
11"	3260-1100	0.75
12"	3260-1200	1.10
13"	3260-1300	1.15
14"	3260-1400	1.20
15"	3260-1500	1.30
16"	3260-1600	1.35
17"	3260-1700	1.40
18"	3260-1800	1.55
20"	3260-2000	1.60
22"	3260-2200	1.80
24"	3260-2400	2.00

ADDITIONAL PINS		
3260-PINS-LARGE0	LARGE BRIDGE PINS	(10) .33
3260-PINS-SMALL0	SMALL BRIDGE PINS	(10) .11

ADDITIONAL NITRILE SEALS		
3260-0000-SP3000	3/8"	0.01
3260-0000-SP4000	1/2"	0.02

Clamp with Pin



- Clamps come from factory with Nitrile seals. Gore-tex® seals are available for an additional charge.

- 3" to 6" Clamps: Small bridge pin with 3/8" wide Nitrile seal from factory.


- 7" to 11" Clamps: Large bridge pin with 3/8" wide Nitrile seal from factory.

- 12" to 24" Clamps: Large bridge pin with 1/2" wide Nitrile seal from factory.

- Supplied with galvanized cotter pin. Gore-tex® seals and SS construction available at additional charge.



Seal Will Be Installed And Folded Over At the Factory. It Will Release Easily Due To The Pressure Sensitive Backing.



While Clamping Down, Slowly Tuck Extra Seal Underneath The Opposing Side Of Clamp.



ORDERING NOTES:

Unless specified, 3" through 24" is QF, over 24" is flanged. Data is subject to change without notice. Stainless steel components requiring flanges will be supplied with SS flanges unless otherwise specified. Stainless steel components are manufactured with NO.304 SS. [Prices for SS 316 = SS 304 X 1.25] Adding a SS after standard part numbers specifies a SS part. For special parts or items to be custom manufactured call for quotation.

WWW.DUCTMONKEY.NET • 951-739-9593