



QUICK-FIT



THE WORLD'S FASTEST DUCTING

ELBOWS


ELBOWS

Ø	PART NO.	ENDS	CLR	STYLE		GAUGE		TANGENTS		WEIGHT (GALV)
				GAL	SS	GAL	SS	GAL	SS	
90 DEGREE										
3"	3210-0390	QF	1.5	S	T	24	14	1.32"	2.00"	0.60
4"	3210-0490	QF	1.0*	P	*T	24	14	1.32"	2.00"	0.80
5"	3210-0590	QF	1.0*	P	*T	24	14	1.32"	2.00"	1.20
6"	3210-0690	QF	1.0*	P	*T	24	14	1.32"	2.25"	1.50
7"	3210-0790	QF	1.0*	P	S	24	22	2.25"	2.25"	2.20
8"	3210-0890	QF	1.5	S	S	22	22	2.25"	2.25"	6.10
9"	3210-0990	QF	1.5	S	S	22	22	2.25"	2.25"	7.60
10"	3210-1090	QF	1.5	S	S	22	22	2.25"	2.25"	9.00
11"	3210-1190	QF	1.5	S	S	22	22	2.25"	2.25"	10.50
12"	3210-1290	QF	1.5	S	S	22	22	2.25"	2.25"	12.40
13"	3210-1390	QF	1.5	S	S	20	20	2.25"	2.25"	14.26
14"	3210-1490	QF	1.5	S	S	20	20	2.25"	2.25"	19.00
15"	3210-1590	QF	1.5	S	S	20	20	2.25"	2.25"	21.25
16"	3210-1690	QF	1.5	S	S	20	20	2.25"	2.25"	24.00
17"	3210-1790	QF	1.5	S	S	20	20	2.25"	2.25"	27.50
18"	3210-1890	QF	1.5	S	S	20	20	2.25"	2.25"	30.90
20"	3210-2090	QF	1.5	S	S	20	20	2.25"	2.25"	35.97
22"	3210-2290	QF	1.5	S	S	20	20	2.25"	2.25"	43.06
24"	3210-2490	QF	1.5	S	S	20	20	2.25"	2.25"	55.50
60 DEGREE										
3"	3210-0360	QF	1.5	S	T	24	14	1.32"	2.00"	0.65
4"	3210-0460	QF	1.0*	P	*T	24	14	1.32"	2.00"	0.80
5"	3210-0560	QF	1.0*	P	*T	24	14	1.32"	2.00"	1.15
6"	3210-0660	QF	1.0*	P	*T	24	14	1.32"	2.25"	1.35
7"	3210-0760	QF	1.0*	P	S	24	22	2.25"	2.25"	1.65
8"	3210-0860	QF	1.5	S	S	22	22	2.25"	2.25"	4.40
9"	3210-0960	QF	1.5	S	S	22	22	2.25"	2.25"	5.50
10"	3210-1060	QF	1.5	S	S	22	22	2.25"	2.25"	6.70
11"	3210-1160	QF	1.5	S	S	22	22	2.25"	2.25"	7.50
12"	3210-1260	QF	1.5	S	S	22	22	2.25"	2.25"	8.96
13"	3210-1360	QF	1.5	S	S	20	20	2.25"	2.25"	12.25
14"	3210-1460	QF	1.5	S	S	20	20	2.25"	2.25"	13.70
15"	3210-1560	QF	1.5	S	S	20	20	2.25"	2.25"	16.00
16"	3210-1660	QF	1.5	S	S	20	20	2.25"	2.25"	18.83
17"	3210-1760	QF	1.5	S	S	20	20	2.25"	2.25"	19.20
18"	3210-1860	QF	1.5	S	S	20	20	2.25"	2.25"	20.81
20"	3210-2060	QF	1.5	S	S	20	20	2.25"	2.25"	25.35
22"	3210-2260	QF	1.5	S	S	20	20	2.25"	2.25"	30.28
24"	3210-2460	QF	1.5	S	S	20	20	2.25"	2.25"	42.50

Elbow



- Galvanized or stainless steel. (Specify if Stainless Steel.)
- Elbows in heavier gauges can be supplied in solid welded construction at an additional cost.

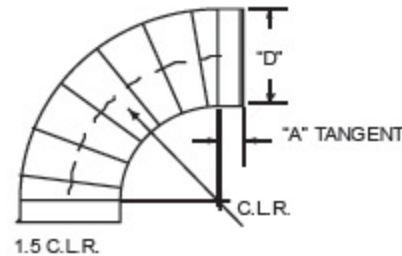

T= Tubed style. CLR= Center Line radius. P= Press formed halves stitch welded together. S= Segmented elbows.
Notes: * 1.0 Galv and 1.5 SS

ORDERING NOTES:

Unless specified, 3" through 24" is QF, over 24" is flanged. Data is subject to change without notice. Stainless steel components requiring flanges will be supplied with SS flanges unless otherwise specified. Stainless steel components are manufactured with NO.304 SS. [Prices for SS 316 = SS 304 X 1.25] Adding a SS after standard part numbers specifies a SS part. For special parts or items to be custom manufactured call for quotation.

WWW.DUCTMONKEY.NET • 951-739-9593